




COUPLINGS

The couplings shown here permit the joining of any combination of standard size tubing and standard pipe with female to female couplings. Other couplings available on special order.

**Pressure Rating.** The pressure rating of AE couplings is based on the lower rated connection used.

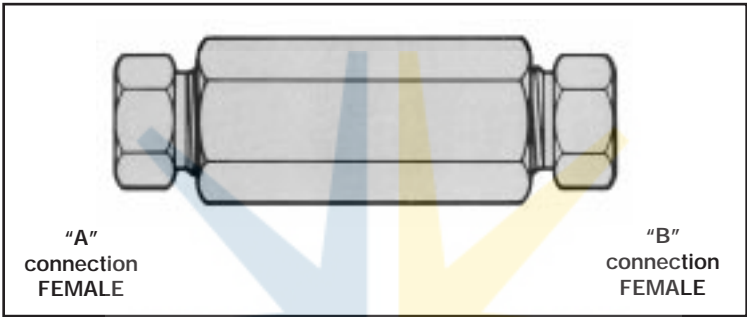

"A" Connection				"B" Connection AE High Pressure			
	Tube Size (in.)	Conn. Type	Pressure (psi)*	1/4 F 250C	3/8 F 375C	9/16 F 562C	5/16 F 312C150
AE Medium Pressure	1/4	SF250 CX	20,000	20F 4463	20F 4663	20F 4963	20F 4563
	3/8	SF375 CX	20,000	20F 6463	20F 6663	20F 6963	20F 6563
	9/16	SF562 CX	20,000	20F 9463	20F 9663	20F 9963	20F 9563
	3/4	SF750 CX	20,000	20F 12463	20F 12663	20F 12963	20F 12563
	1	SF1000 CX	20,000	20F 16463	20F 16663	20F 16963	20F 16563

*\*Maximum pressure rating must not exceed rating of tubing used.*

*Note: All reducers and adaptors are furnished complete with connection components unless otherwise specified.*

**CAUTION:** See appropriate pressure section in reference to proper selection of tubing.

**BACK TO**

All general terms and conditions of sale, including limitations of our liability, apply to all products and services sold.

PLEASE SEE FOLLOWING PAGES FOR FURTHER DETAILS *CATALOGUE*