
COUPLINGS



The couplings shown here permit the joining of any combination of standard size tubing and standard pipe with female to female couplings. Other couplings available on special order.

Pressure Rating. The pressure rating of AE couplings is based on the lower rated connection used.

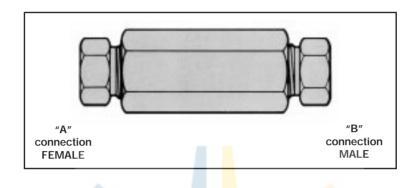

"A" Connection				"B" Connection AE High Pressure			
	Tube Size (in.)	Conn. Type	Pres- sure (psi)*	1 <mark>/4</mark> F 25 <mark>0C</mark>	3/8 F 375C	9/16 F 562C	5/16 F 312C40
NPT	1/8	NPT	10,000	6 <mark>F</mark> 2483	6F 2683	6F 2983	6F 2583
	1/4	NPT	10,000	6 <mark>F</mark> 44 <mark>83</mark>	6F 4683	6F 4983	6F 4583
	3/8	NPT	10,000	6 <mark>F</mark> 64 <mark>83</mark>	6F 6683	6F 6983	6F 6583
	1/2	NPT	10,000	6 <mark>F</mark> 84 <mark>8</mark> 3	6F 8683	6F 8983	6F 8583
	3/4	NPT	10,000			6F 12983	
	1	NPT	10,000	6F 16483		6F 16983	

*Maximum pressure rating must not exceed rating of tubing used.

Note: All reducers and adaptors are furnished complete with connection components unless otherwise specified.

CAUTION: See appropriate pressure section in reference to proper selection of tubing.

BACK TO

All general terms and conditions of sale, including limitations of our liability, apply to all products and services sold.

PLEASE SEE FOLLOWING PAGES FOR FURTHER DETAILS CATALOGUE

Р

Α

G

Ε