

HIGH PRESSURE FITTINGS PRESSURES TO 60,000 PSI


AE high pressure fittings Series F are the standard of the industry for pressures to 60,000 psi. Utilizing AE high pressure coned and threaded connections, these fittings are correlated with Series 30VM, 40VM and 60VM valves and AE high pressure tubing.

Connection Components

All AE valves and fittings are supplied complete with appropriate glands and collars. To order these components separately, use order numbers listed. When using plug, collar is not required.



BULKHEAD COUPLING

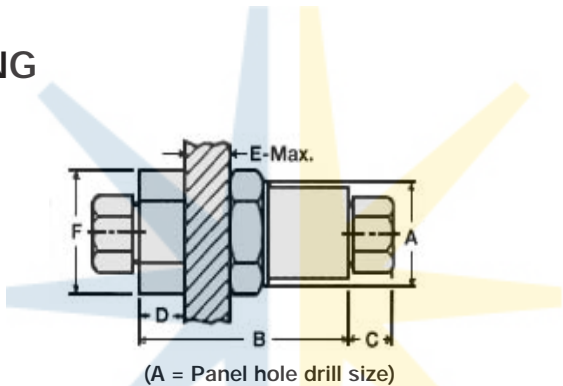

| Catalog Number | Connec- tion Type | O.D. Tube Size (inches) | Pressure Rating psi* | Minimum Opening (inches) | Dimension (inches) | | | | | |
|----------------|----------------------|----------------------------|----------------------|--------------------------|--------------------|------|------|------|------|------|
| | | | | | A | B | C | D | E | F |
| 60BF4433 | F250C | 1/4 | 60,000 | 0.094 | 0.94 | 1.88 | 0.50 | 0.50 | 0.38 | 1.00 |
| 60BF6633 | F375C | 3/8 | 60,000 | 0.125 | 1.12 | 2.38 | 0.53 | 0.78 | 0.38 | 1.38 |
| 60BF9933 | F562C | 9/16 | 60,000 | 0.188 | 1.69 | 2.75 | 0.81 | 1.00 | 0.38 | 1.88 |
| 40BF9933 | F562C40 | 9/16 | 40,000 | 0.250 | 1.69 | 2.75 | 0.81 | 1.00 | 0.38 | 1.88 |

All dimensions for reference only and subject to change.

BACK TO

All general terms and conditions of sale, including limitations of our liability, apply to all products and services sold.

PLEASE SEE FOLLOWING PAGES FOR FURTHER DETAILS **CATALOGUE**