


COUPLINGS

The couplings shown here permit the joining of any combination of standard size tubing and standard pipe with female to female couplings. Other couplings available on special order.

Pressure Rating. The pressure rating of AE couplings is based on the lower rated connection used.

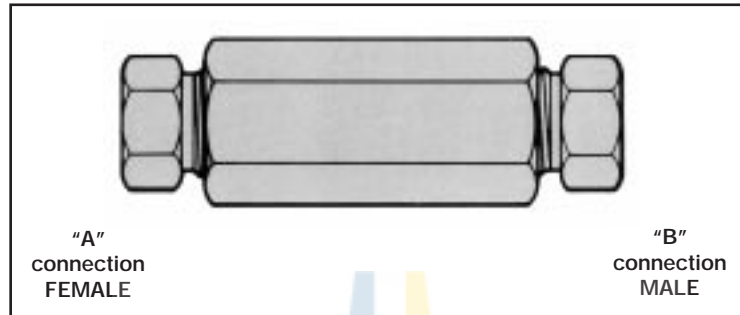

"A" Connection			"B" Connection AE High Pressure						
	Tube Size (in.)	Conn. Type	Pressure (psi)*	1 SF1000 CX30	1/4 F 250C	3/8 F 375C	9/16 F 562C	9/16 F 562C40	5/16 F 312C150
AE High Pressure	1	SF1000 CX30	30,000	30FX 16	30F 16463	30F 16663	30F 16963		
	1/4	F250 C	60,000		60F 4433	60F 4633	60F 4933		60F 4533
	3/8	F375 C	60,000			60F 6633	60F 6933		60F 6533
	9/16	F562 C	60,000				60F 9933		60F 9533
	9/16	F562 C40	40,000					40F 9933	
	5/16	F312 C150	150,000						

P
A
G
E

*Maximum pressure rating must not exceed rating of tubing used.

Note: All reducers and adaptors are furnished complete with connection components unless otherwise specified.

CAUTION: See appropriate pressure section in reference to proper selection of tubing.

[BACK TO](#)

All general terms and conditions of sale, including limitations of our liability, apply to all products and services sold.

PLEASE SEE FOLLOWING PAGES FOR FURTHER DETAILS

T2000