


CHECK VALVES  
PRESSURES TO 60,000 PSI




BALL TYPE EXCESS FLOW VALVES

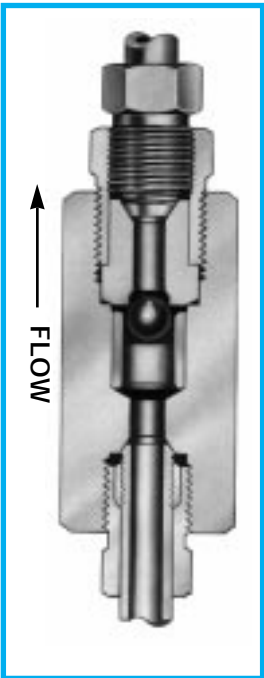

Protects pressure gauges and pressure instrumentation from sudden surges or sudden venting in the event of line failure.  
**Materials.** Body, cover, sleeve, cover gland: Type 316 SS. Ball: 300 series SS.  
**Vertical Installation.** Since this type of check valve employs a non-spring loaded ball, valve **MUST** be installed in VERTICAL position with arrow on valve body pointing UP (cover gland up).  
**Resetting Valve.** Equalise the pressure across the ball. The ball will drop and reset automatically.

P  
A  
G  
E

Catalog Number	Connection Type	Pressure Rating (psi)	Orifice (inches)	Rated Cv	Dimensions (inches)				Valve Pattern
					A	B	C	Hex	
CK4402	F250C	60,000	0.094	-	3.31	2.50	0.50	1.18	 SERIES CK
CK6602	F375C	60,000	0.125	-	3.75	2.75	0.53	1.18	
CK9902	F562C	60,000	0.188	-	4.62	3.38	0.81	1.50	

*Note: All check valves are furnished complete with connection components unless otherwise specified.  
All dimensions for reference only and subject to change.*

BACK TO

All general terms and conditions of sale, including limitations of our liability, apply to all products and services sold.

PLEASE SEE FOLLOWING PAGES FOR FURTHER DETAILS CATALOGUE