


TUPY PIPE FITTINGS - BSP

HEXAGON REDUCING NIPPLE 245

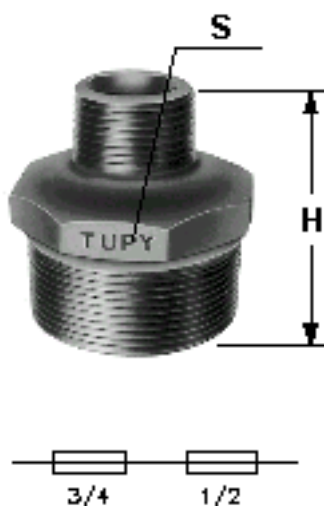

Nominal Diameter		Dimensions in mm		Unitary weight	Nominal Diameter		Dimensions in mm		Unitary weight
in	mm	H	S (max)	Galvanisation (kg)	in	mm	H	S (max)	Galvanisation (kg)
3/8 x 1/4	10 x 8	36	19	0.007	1 1/2 x 1	40 x 25	59	50	0.232
1/2 x 1/4	15 x 8	44	22	0.052	1 1/2 x 1 1/4	40 x 32	59	50	0.250
1/2 x 3/8	15 x 10	44	22	0.053	2 x 1	50 x 25	69	65	0.402
3/4 x 3/8	20 x 10	47	30	0.085	2 x 1 1/4	50 x 32	69	65	0.412
3/4 x 1/2	20 x 15	47	30	0.089	2 x 1 1/2	50 x 40	69	65	0.418
1 x 1/2	25 x 15	56	36	0.129	2 1/2 x 1 1/4	65 x 32	75	80	0.604
1 x 3/4	25 x 20	53	36	0.137	2 1/2 x 1 1/2	65 x 40	75	80	0.600
1 1/4 x 1/2	32 x 15	57	46	0.192	2 1/2 x 2	65 x 50	75	80	0.600
1 1/4 x 3/4	32 x 20	57	46	0.213	3 x 1 1/2	80 x 40	80	95	0.902
1 1/4 x 1	35 x 25	57	46	0.216	3 x 2	80 x 50	80	95	0.907
1 1/2 x 3/4	40 x 20	59	50	0.201	3 x 2 1/2	80 x 65	80	95	1.113

Dimensions:	According to ABNT NBR 6943 , ISO 49 and DIN 2950
Material:	Black Malleable Iron
Surface Protection:	Black or Galvanised according to ABNT NBR 6323
Screw:	BSP according to ISO 7-1, DIN 2999, ABNT NBR 6414
Tolerance Pressure:	According to pressure table

BSP FITTINGS				
Fluid conduction service pressure (According to ISO 49, DIN 2950 and ABNT NBR 6943)				Trial pressure
Temperature		Up to 120°C	Up to 300°C	Ambient
Pressure	lbf/in ² (psi)	360	290	1.500
	kgf/cm ² (bar)	25	20	100
Nominal Size		1/4 to 6		

BACK TO

PLEASE SEE FOLLOWING PAGE FOR FURTHER DETAILS CATALOGUE