


TUPY PIPE FITTINGS - BSP

REDUCING BUSHING 241

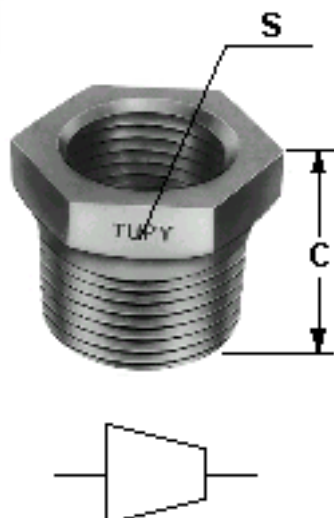

Nominal Diameter		Dimensions in mm		Unitary Weight	Nominal Diameter		Dimensions in mm		Unitary Weight
in	mm	C	S (max)	Galvanisation (kg)	in	mm	C	S (max)	Galvanisation (kg)
3/8 x 1/4	10 x 8	20	19	0.023	2 x 1	50 x 25	35	65	0.420
1/2 x 1/4	15 x 8	20	19	0.033	2 x 1 1/4	50 x 32	35	65	0.374
1/2 x 3/8	15 x 10	24	22	0.025	2 x 1 1/2	50 x 40	35	65	0.299
3/4 x 1/4	20 x 8	26	30	0.081	2 1/2 x 1	65 x 25	40	80	0.629
3/4 x 1/2	20 x 10	26	30	0.062	2 1/2 x 1 1/4	65 x 32	40	80	0.654
3/4 x 3/8	20 x 15	26	30	0.054	2 1/2 x 1 1/2	65 x 40	40	80	0.646
1 x 3/8	25 x 10	29	36	0.120	2 1/2 x 2	65 x 50	40	80	0.480
1 x 1/2	25 x 15	29	36	0.104	3 x 1 1/2	80 x 40	44	95	0.947
1 x 3/4	32 x 15	29	36	0.087	3 x 2	80 x 50	44	95	0.908
1 1/4 x 1/2	32 x 20	31	46	0.213	3 x 2 1/2	80 x 65	44	95	0.596
1 1/4 x 3/4	32 x 25	31	46	0.184	4 x 2	100 x 50	51	120	1.691
1 1/4 x 1	40 x 15	31	46	0.148	4 x 2 1/2	100 x 65	51	120	1.710
1 1/2 x 1/2	40 x 20	31	50	0.266	4 x 3	100 x 80	51	120	1.587
1 1/2 x 3/4	40 x 25	31	50	0.250	5 x 4	125 x 100	57	145	2.350
1 1/2 x 1	40 x 32	31	50	0.207	6 x 4	50 x 100	58	175	3.869
1 1/2 x 1 1/4	50 x 15	31	50	0.136	6 x 5	50 x 12	58	175	3.065
2 x 1/2	50 x 20	35	65	0.397					

Dimensions:	According to ABNT NBR 6943 , ISO 49 and DIN 2950
Material:	Black Malleable Iron
Surface Protection:	Black or Galvanised according to ABNT NBR 6323
Screw:	BSP according to ISO 7-1, DIN 2999, ABNT NBR 6414
Tolerance Pressure:	According to pressure table

BSP FITTINGS				
Fluid conduction service pressure (According to ISO 49, DIN 2950 and ABNT NBR 6943)				Trial pressure
Temperature		Up to 120°C	Up to 300°C	Ambient
Pressure	lbf/in ² (psi)	360	290	1.500
	kgf/cm ² (bar)	25	20	100
Nominal Size		1/4 to 6		

BACK TO

PLEASE SEE FOLLOWING PAGE FOR FURTHER DETAILS *CATALOGUE*