


TUPY PIPE FITTINGS - BSP REDUCTION TEES - 130R

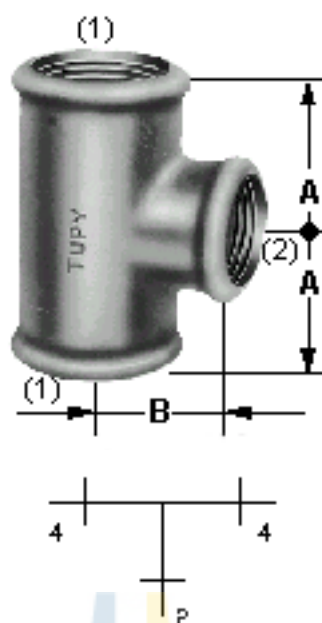

Nominal Diameter		Dimensions in mm		Unitary weight Galvanisation (kg)	Nominal Diameter		Dimensions in mm		Unitary weight Galvanisation (kg)
in (1)	(2)	mm (1) (2)	A		in (1) (2)	mm (1) (2)	A	B	
3/8 x 1/4	10 x 8	23	23	0.070	2 x 3/4	50 x 20	40	50	0.524
1/2 x 1/4	15 x 8	24	24	0.087	2 x 1	50 x 25	44	52	0.640
1/2 x 3/8	15 x 10	26	26	0.116	2 x 1 1/4	50 x 32	48	54	0.695
3/4 x 3/8	20 x 10	28	28	0.157	2 1/2 x 1	50 x 40	52	55	1.020
3/4 x 1/2	20 x 15	30	31	0.175	2 1/2 x 1 1/4	65 x 25	47	60	0.900
1 x 3/8	25 x 10	30	32	0.194	1 x 3/8	65 x 32	52	62	1.167
1 x 1/2	25 x 15	32	34	0.226	2 1/2 x 1 1/2	65 x 40	55	63	1.228
1 x 3/4	25 x 20	35	36	0.252	2 1/2 x 2	65 x 50	61	66	1.460
1 1/4 x 1/2	32 x 15	34	36	0.290	3 x 1	80 x 25	51	67	1.246
1 1/4 x 3/4	32 x 20	36	41	0.305	3 x 1 1/4	80 x 32	55	70	1.358
1 1/4 x 1	32 x 25	40	42	0.366	3 x 1 1/2	80 x 40	58	71	1.457
1 1/2 x 1/2	40 x 15	36	42	0.364	3 x 2	80 x 50	64	73	1.647
1 1/2 x 3/4	40 x 20	38	44	0.350	3 x 2 1/2	80 x 65	72	76	1.884
1 1/2 x 1	40 x 25	42	46	0.450	4 x 2	100 x 50	70	86	2.313
1 3/4 x 1 1/4	40 x 32	40	48	0.540	4 x 3	100 x 80	84	92	3.229
2 x 1/2	50 x 15	38	48	0.518					

Dimensions:	According to ABNT NBR 6943 , ISO 49 and DIN 2950
Material:	Black Malleable Iron
Surface Protection:	Black or Galvanised according to ABNT NBR 6323
Screw:	BSP according to ISO 7-1, DIN 2999, ABNT NBR 6414
Tolerance Pressure:	According to pressure table

BSP FITTINGS				
Fluid conduction service pressure (According to ISO 49, DIN 2950 and ABNT NBR 6943)				Trial pressure
Temperature		Up to 120°C	Up to 300°C	Ambient
Pressure	lbf/in ² (psi)	360	290	1.500
	kgf/cm ² (bar)	25	20	100
Nominal Size		1/4 to 6		

BACK TO

PLEASE SEE FOLLOWING PAGE FOR FURTHER DETAILS *CATALOGUE*