


TUPY PIPE FITTINGS - BSP UNION 340

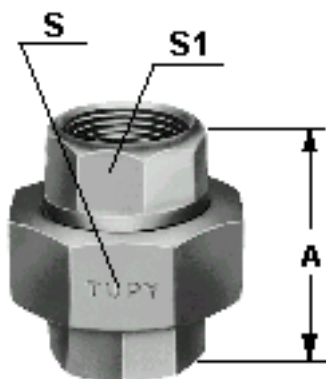

Nominal Diameter		Dimensions in mm			Unitary weight Galvanisation (kg)
in	mm	A	S(max.)	S1	
1/4	8	42	27	17	0,067
3/8	10	45	32	20	0,100
1/2	15	48	41	25	0,160
3/4	20	52	50	32	0,269
1	25	58	55	39	0,350
1 1/4	32	65	70	49	0,628
1 1/2	40	70	75	55	0,734
2	50	78	90	69	1,136
2 1/2	65	85	110	85	1,717
3	80	95	130	98	2,553
4	100	110	150	124	3,513

Dimensions:	According to ABNT NBR 6943 , ISO 49 and DIN 2950
Material:	Black Malleable Iron
Surface Protection:	Black or Galvanised according to ABNT NBR 6323
Screw:	BSP according to ISO 7-1, DIN 2999, ABNT NBR 6414
Tolerance Pressure:	According to pressure table

P
A
G
E

BSP FITTINGS				
Fluid conduction service pressure (According to ISO 49, DIN 2950 and ABNT NBR 6943)				Trial pressure
Temperature		Up to 120°C	Up to 300°C	Ambient
Pressure	lbf/in ² (psi)	360	290	1.500
	kgf/cm ² (bar)	25	20	100
Nominal Size		1/4 to 6		

BACK TO

PLEASE SEE FOLLOWING PAGE FOR FURTHER DETAILS CATALOGUE