


TUPY PIPE FITTINGS - BSP MALE-FEMALE UNION 341

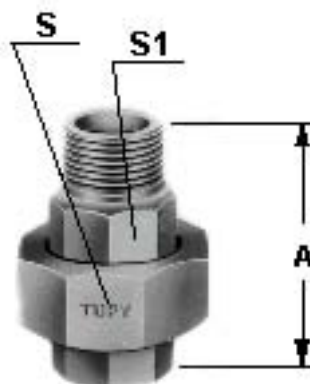

Nominal Diameter		Dimensions in mm			Unitary weight Galvanisation (kg)
in	mm	A	S(max.)	S1	
1/2	15	66	41	25	0,190
3/4	20	72	50	32	0,322
1	25	80	55	39	0,435
1 1/4	32	90	70	49	0,735
1 1/2	40	95	75	55	0,857
2	50	106	80	69	1,309

Dimensions:	According to ABNT NBR 6943 , ISO 49 and DIN 2950
Material:	Black Malleable Iron
Surface Protection:	Black or Galvanised according to ABNT NBR 6323
Screw:	BSP according to ISO 7-1, DIN 2999, ABNT NBR 6414
Tolerance Pressure:	According to pressure table

BSP FITTINGS				
Fluid conduction service pressure (According to ISO 49, DIN 2950 and ABNT NBR 6943)				Trial pressure
Temperature		Up to 120°C	Up to 300°C	Ambient
Pressure	lbf/in ² (psi)	360	290	1.500
	kgf/cm ² (bar)	25	20	100
Nominal Size		1/4 to 6		

BACK TO

PLEASE SEE FOLLOWING PAGE FOR FURTHER DETAILS **CATALOGUE**