


UNCUT SPLIT FLANGES

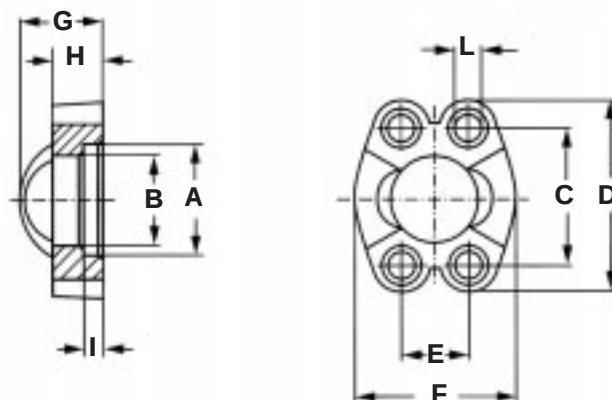

Maximum recommended working pressure kg/cm²	Nom. flange size in	Type	Dimensions											Weight kg	
			A	B	C	D	E	F	G	H	I	L	M		
		SERIES 3000											Metric	Unc	
345	1/2"	AFS1301	30,96	24,26	38,10	54	17,48	45,6	19	13	6,22	8,75	M8x30	5/16 x 1 1/4"	0,12
345	3/4"	AFS1302	38,89	32,13	47,63	65	22,23	51,8	22	14	6,22	10,75	M10x35	3/8 x 1 1/2"	0,16
345	1"	AFS1303	45,24	38,48	52,37	70	26,19	58,4	24	16	7,49	10,75	M10x35	3/8 x 1 1/2"	0,22
276	1 1/4"	AFS1304	51,59	43,69	58,72	79	30,18	72,6	22	14	7,49	12	M10x35	7/16 x 1 3/4"	0,30
276	1 1/4"	AFS1304L1275	51,59	43,69	58,72	79	30,18	72,6	22	14	7,49	12,75	M10x35	7/16 x 1 3/4"	0,30
207	1 1/2"	AFS1305	61,09	50,80	69,85	94	35,71	82,2	25	16	7,49	13,5	M12x35	1/2 x 1 3/4"	0,43
207	2"	AFS1306	72,24	62,74	77,77	102	42,88	96,4	26	16	9,02	13,5	M12x35	1/2 x 1 3/4"	0,56
172	2 1/2"	AFS1307	84,94	74,93	88,90	114	50,80	108,2	38	19	9,02	13,5	M12x40	1/2 x 1 3/4"	0,74
138	3"	AFS1308	102,39	90,93	106,38	135	61,93	130,6	41	22	9,02	16,75	M16x50	5/8 x 2"	1,30
34	3 1/2"	AFS1309	115,10	102,36	120,65	152	69,85	139	28	22	10,72	17	M16x50	5/8 x 2"	1,27
34	4"	AFS1310	127,79	115,06	130,18	162	77,77	152	35	25	10,72	17	M16x50	5/8 x 2"	1,65
34	5"	AFS1311	153,19	140,46	152,40	184	92,08	180	41	28	10,72	17	M16x50	5/8 x 2"	2,50

DESIGNATION FOR ORDER

Only flange

AFS...
AFS...L

With metric screws, grower type washers and o-ring

AFSI...M

With unc screws, grower type washers and o-ring

AFSI...U

NOTES

Materials: ST52-3

*For unc screws L=13,5

Available in stainless steel AISI 316L.

Superficial coating in yellow galvanising.

BACK TO

CATALOGUE