


"BLIND" FLANGES

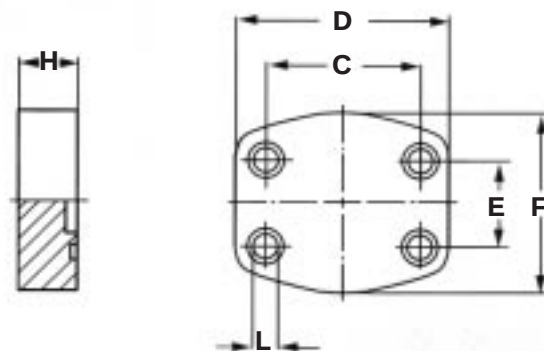

Maximum recommended working pressure kg/cm ²	Nom. flange size in	Type	Dimensions						Screws		Or Type	Weight kg
			C	D	E	F	H	L	Metric	Unc		
		SERIES 3000										
345	1/2"	AFC080	38,10	56	17,48	48	16	9	M8x30	5/16 x 1 1/4"	4075	0,24
345	3/4"	AFC100	47,63	65	22,23	50	16	11	M10x35	3/8 x 1 1/2"	4100	0,30
345	1"	AFC102	52,37	70	26,19	60	19	11	M10x35	3/8 x 1 1/2"	4131	0,42
276	1 1/4"	AFC104	58,72	79	30,18	68	18	11,5	M10x40	7/16 x 1 3/4"	4150	0,55
207	1 1/2"	AFC106	69,85	93	35,71	78	20	13,5	M12x45	1/2 x 1 3/4"	4187	0,82
207	2"	AFC108	77,77	102	42,88	90	20	13,5	M12x45	1/2 x 1 3/4"	4225	1,08
172	2 1/2"	AFC110	88,90	114	50,80	105	20	13,5	M12x45	1/2 x 1 3/4"	4275	1,40
138	3"	AFC112	106,38	134	61,93	124	24	17,5	M16x50	5/8 x 2"	4337	2,38
34	3 1/2"	AFC114	120,65	152	69,85	136	22	17,5	M16x50	5/8 x 2"	4387	2,91
34	4"	AFC116	130,18	162	77,77	146	25	17,5	M16x50	5/8 x 2"	4437	3,98
34	5"	AFC118	152,40	190	92,08	170	28	17,5	M16x50	5/8 x 2"	4537	4,00

DESIGNATION FOR ORDER

Only flange

AFC...

With metric screws, grower type washers and o-ring

AFC...M

With unc screws, grower type washers and o-ring

AFC...U

NOTES

Material: ST52.3

*For unc screws L=13,5

Available in stainless steel AISI 316L

[BACK TO](#)
[CATALOGUE](#)