


# TECHNICAL SPECIFICATION: FS10 ABERDEEN Heavy Duty Oil Delivery Hose

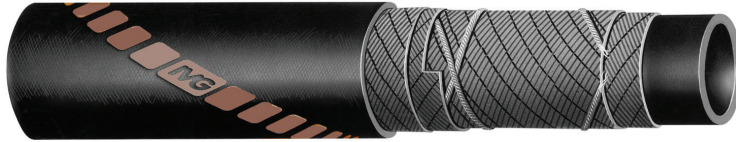

## Construction

<b>Tube:</b>	Black nitrile rubber
<b>Reinforcement:</b>	Synthetic cord plies and copper wires
<b>Cover:</b>	Black synthetic rubber with brown stripe
<b>Temperature Range:</b>	-30°C to +90°C

## Typical Application:

Fuel Oil, Liquid Mud containing Crude Oil and Grit delivery in offshore applications

Part Number	Inside Diameter		Outside Diameter		Working Pressure		Min. Burst Pressure		Min. Bend Radius	Weight	Cont. Length
	mm	inch	mm	inch	BAR	PSI	BAR	PSI	mm	Kg/m	Mtr
Offshore FS10 Aberdeen	76	3	91	3.58	10	150	40	600	686	2.3	122
Offshore FS10 Aberdeen	102	4	118	4.64	10	150	40	600	915	3.2	122

End fittings and safety accessories available include but are not limited to: API Male Threads, Hammer Unions, Flanges, Camlocks, Victualic Grooved Inserts, Dry Break Couplings, Weaklink/Breakaways, Lifting Hooks c/w safety clamps, lace up and clip on reflective flotation collars.



## DET NORSKE VERITAS

### TYPE APPROVAL CERTIFICATE

CERTIFICATE NO. **P-13931**