


# TECHNICAL SPECIFICATION: DUNBAR Liquid Mud Delivery Hose

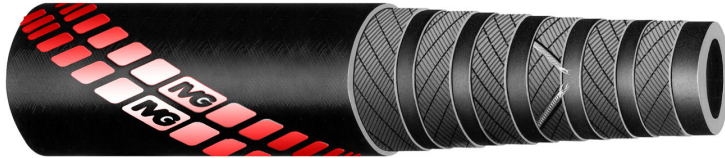

## Construction

<b>Tube:</b>	Black nitrile rubber
<b>Reinforcement:</b>	Synthetic cord plies and copper wire
<b>Cover:</b>	Black synthetic rubber with 2 red stripes
<b>Temperature Range:</b>	-25°C to +70°C

## Typical Application:

Fuel Oil, Liquid Mud containing Crude Oil and Grit delivery in offshore applications

Part Number	Inside Diameter		Outside Diameter		Working Pressure		Actual Burst Pressure		Min. Bend Radius	Weight	Cont. Length
	mm	inch	mm	inch	BAR	PSI	BAR	PSI	mm	Kg/m	Mtr
Offshore Dunbar 55	102	4	137	5.39	55	825	176	2640	650	7.4	61

End fittings and safety accessories available include but are not limited to: API Male Threads, Hammer Unions, Flanges, Camlocks, Victualic Grooved Inserts, Dry Break Couplings, Weaklink/Breakaways, Lifting Hooks c/w safety clamps, lace up and clip on reflective flotation collars.



## DET NORSKE VERITAS

### TYPE APPROVAL CERTIFICATE

CERTIFICATE NO. **P-13931**