


TECHNICAL SPECIFICATION: FH10 TROON Oil Suction & Delivery Hose

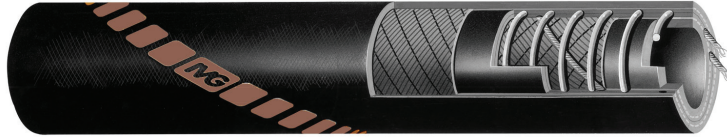

Construction

Tube:	Black nitrile rubber
Reinforcement:	Synthetic cord and an embedded helix wire and copper wires
Cover:	Black synthetic rubber with brown stripe
Temperature Range:	-30°C to +90°C

Typical Application:

Fuel Oil, Liquid Mud containing Crude Oil and Grit suction and delivery in offshore applications

Part Number	Inside Diameter		Outside Diameter		Working Pressure		Min. Burst Pressure		Min. Bend Radius	Weight	Cont. Length
	mm	inch	mm	inch	BAR	PSI	BAR	PSI	mm	Kg/m	Mtr
Offshore FH10 Troon	76	3	93.5	3.68	10	150	40	600	500	3.594	122
Offshore FH10 Troon	102	4	120	4.72	10	150	40	600	600	4.952	122
Offshore FH10 Troon	127	5	151	5.94	10	150	40	600	900	8.037	61

End fittings and safety accessories available include but are not limited to: API Male Threads, Hammer Unions, Flanges, Camlocks, Victualic Grooved Inserts, Dry Break Couplings, Weaklink/Breakaways, Lifting Hooks c/w safety clamps, lace up and clip on reflective flotation collars.



DET NORSKE VERITAS

TYPE APPROVAL CERTIFICATE

CERTIFICATE NO. **P-13931**