



TECHNICAL SPECIFICATION: PH10 TWEED Potable Water Suction & Delivery Hose

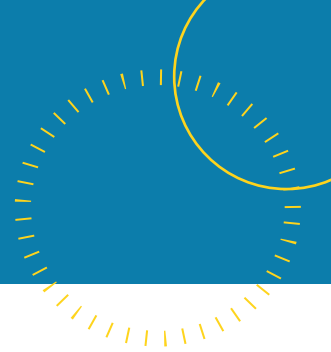

Construction

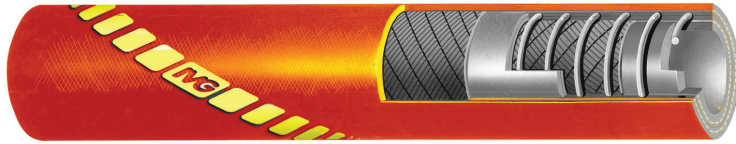

Tube:	White food quality EPDM
Reinforcement:	Synthetic cord and embedded helix wire
Cover:	Orange EPDM with yellow stripe
Temperature Range:	-40°C to +100°C

Typical Application:

Potable Water suction and delivery in offshore applications

Part Number	Inside Diameter		Outside Diameter		Working Pressure		Min. Burst Pressure		Min. Bend Radius	Weight	Cont. Length
	mm	inch	mm	inch	BAR	PSI	BAR	PSI	mm	Kg/m	Mtr
Offshore PH10 Tweed	76	3	94	3.7	10	150	40	600	610	3.589	61
Offshore PH10 tweed	102	4	121	4.76	10	150	40	600	813	5.301	61

End fittings and safety accessories available include but are not limited to: API Male Threads, Hammer Unions, Flanges, Camlocks, Victualic Grooved Inserts, Dry Break Couplings, Weaklink/Breakaways, Lifting Hooks c/w safety clamps, lace up and clip on reflective flotation collars.



DET NORSKE VERITAS

TYPE APPROVAL CERTIFICATE

CERTIFICATE NO. **P-13931**