


WGG
Bulkhead Female Union - NPTF



P
A
G
E

A	Part Number	B1	C	C4	L	P	T	T1	W	Weight g.
1/8	1/8WGGB	5/8-18	7/8*	1.5/16*	38	10.0	7	8	20	72
1/4	1/4WGGB	3/4-16	1*	1.1/8*	38	14.0	7	10	18	100
3/8	3/8WGGB	1-14	1.1/4*	1.3/8*	34	15.0	7	10	13	128
1/2	1/2WGGB	1.1/8-14	1.1/8*	1.1/4*	38	19.0	7	12	16	159
3/4	3/4WGGB	M34x1.5	41	41	39	17.5	10	8	19	214
1	1WGGB	M45x2	55	58	46	20.5	13	11	19	553


*inch dimensions

BACK TO

PLEASE SEE FOLLOWING PAGE FOR FURTHER DETAILS

CATALOGUE

Brass Adaptors

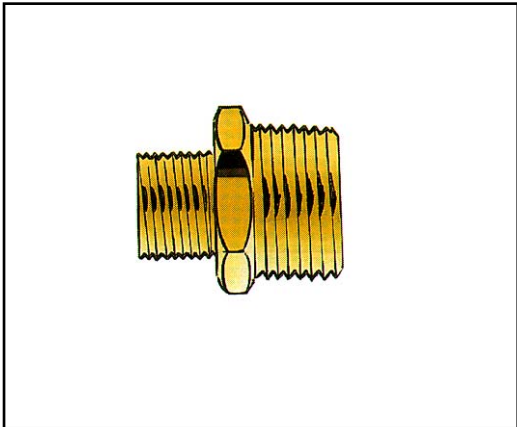


To simplify the installation of pneumatic systems, Parker supplies a comprehensive range of adaptors for BSPP, BSPT and NPT pipe threads. The range includes pipe nipples, pipe connectors, reducers, bulkhead female unions, elbows, tees, crosses and hex head plugs.

Technical Features


Material	Working Temperature	Working Pressure
Brass	From -60°C to +190°C	60 bar

Advantages

Brass forgings

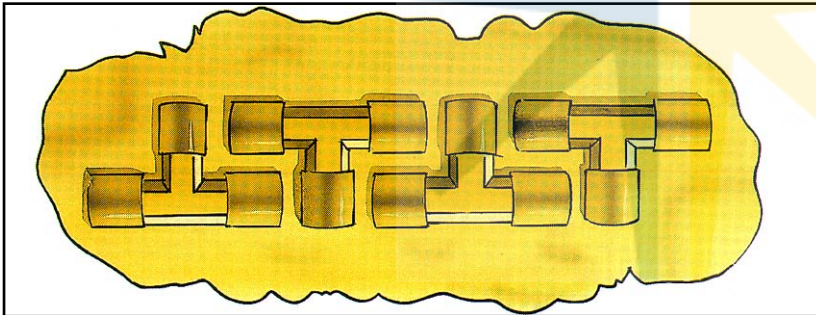

Parker brass adaptors are produced from hot forgings to meet exacting tolerances.

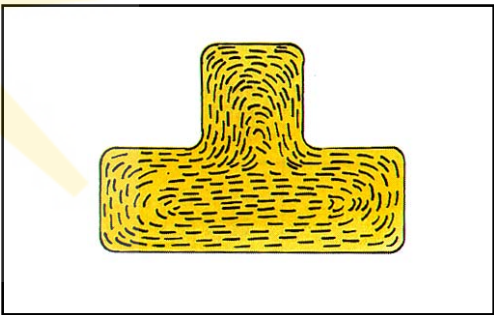

The hot forging process increases the density of the material, refines the grain structure and improves material strength.

Packaging



Parker brass adaptors are packaged in biodegradable plastic bags preventing thread damage and ensuring a quality adaptor.

P
A
G
E

BACK TO

CATALOGUE