



Type SPBE-20

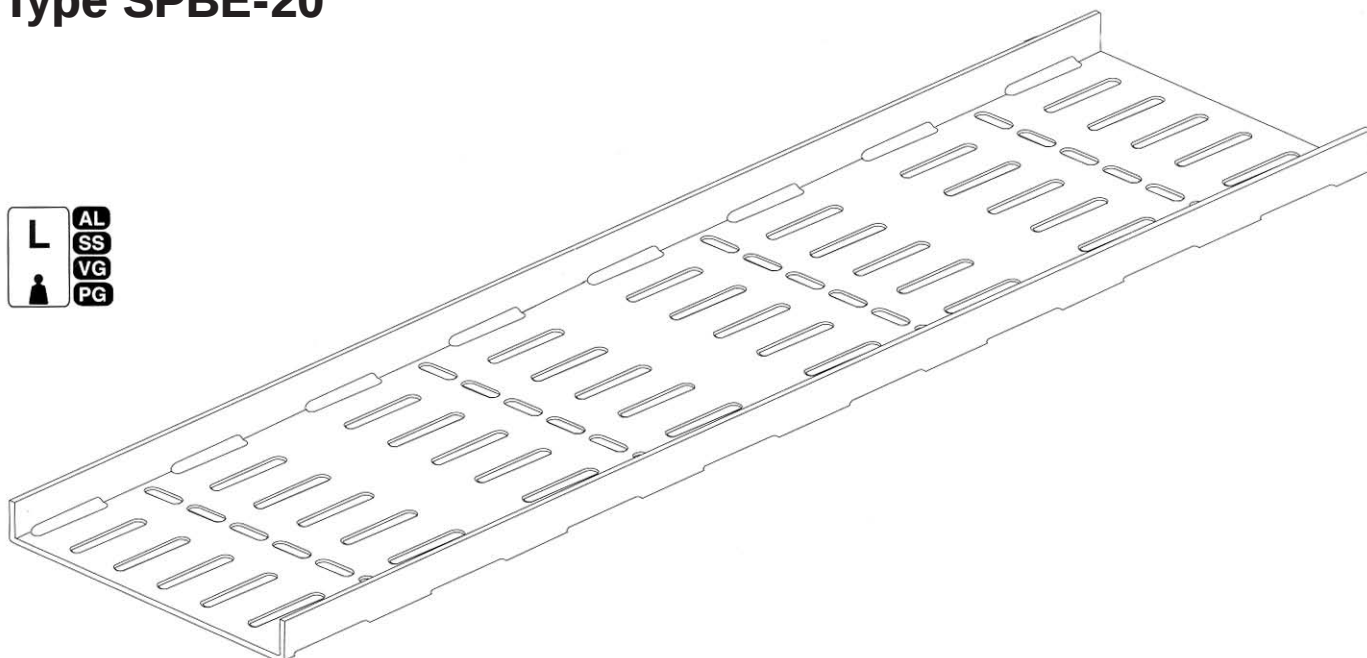

Length:	3m
Material thickness:	VG and AL: 2,0mm PG: 1,5mm (50-200) 2mm (300-600) SS: 1,5mm
On request:	Epoxy coated and special treatment

In PG* and AL* with preslots for self tapping screws.

Preslotted holes for self tapping screws (study the slot designs below) only in the material qualities PG* and AL*.

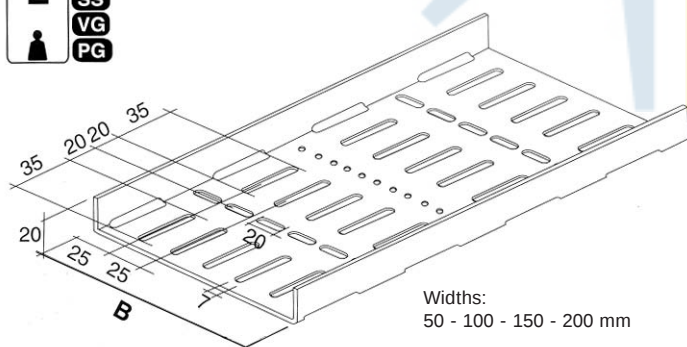

Widths:
50 - 100 - 150 - 200 mm

Cable Tray SPBE-20

LOADING TABLE SPBE-20

Width	Support Spacing			
	0,5m	1,0m	1,5m	2,0m
50mm	372 kg/m	93 kg/m	33 kg/m*	14 kg/m*
100mm	320 kg/m	81 kg/m	36 kg/m	16 kg/m*
150mm	320 kg/m	81 kg/m	36 kg/m	17 kg/m*
200mm	320 kg/m	81 kg/m	36 kg/m	18 kg/m*
300mm	320 kg/m	81 kg/m	36 kg/m	19 kg/m*
400mm	320 kg/m	81 kg/m	36 kg/m	20 kg/m*


Material: 1,5mm SS.

The table indicates the maximum allowable uniformly distributed load. A safety factor of 2 is included. Those marked with a (*) indicate the maximum permitted load with a deflection of 1% of the support spacing.

SPBE-20

Order no. state type + flange height + tray width

Type	PG* Order No.	V/G Order No.	SS Order No.	AL* Order No.	Weight SS
SPBE 20-50	1372201	77440	77444	1372217	0,9 kg/m
SPBE 20-100	1372203	77441	77445	1372219	1,4 kg/m
SPBE 20-150	1372205	77442	77446	1372221	1,9 kg/m
SPBE 20-500	1372207	77443	77447	1372223	2,4 kg/m

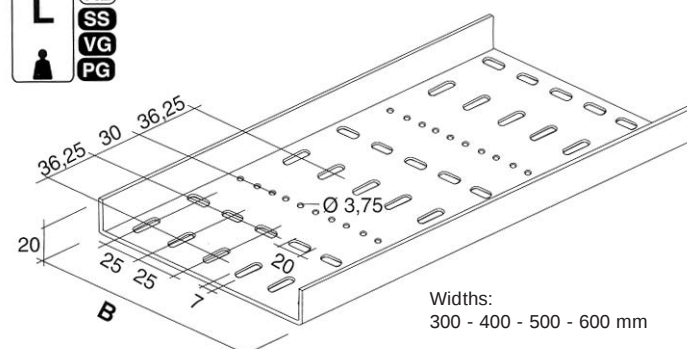

Widths:
300 - 400 - 500 - 600 mm

SPBE-20

Order no. state type + flange height + tray width

Type	PG* Order No.	VG Order No.	SS Order No.	AL* Order No.	Weight SS
SPBE 20-300	1372209	65319	65735	1372225	3,7 kg/m
SPBE 20-400	1372211	65320	68464	1372227	4,8 kg/m
SPBE 20-500	1372213	65321	69846	1372229	6,2 kg/m
SPBE 20-600	1372215	65322	68465	1372231	6,9 kg/m

BACK TO