


SUBSEA BOP HOSE AND FITTINGS

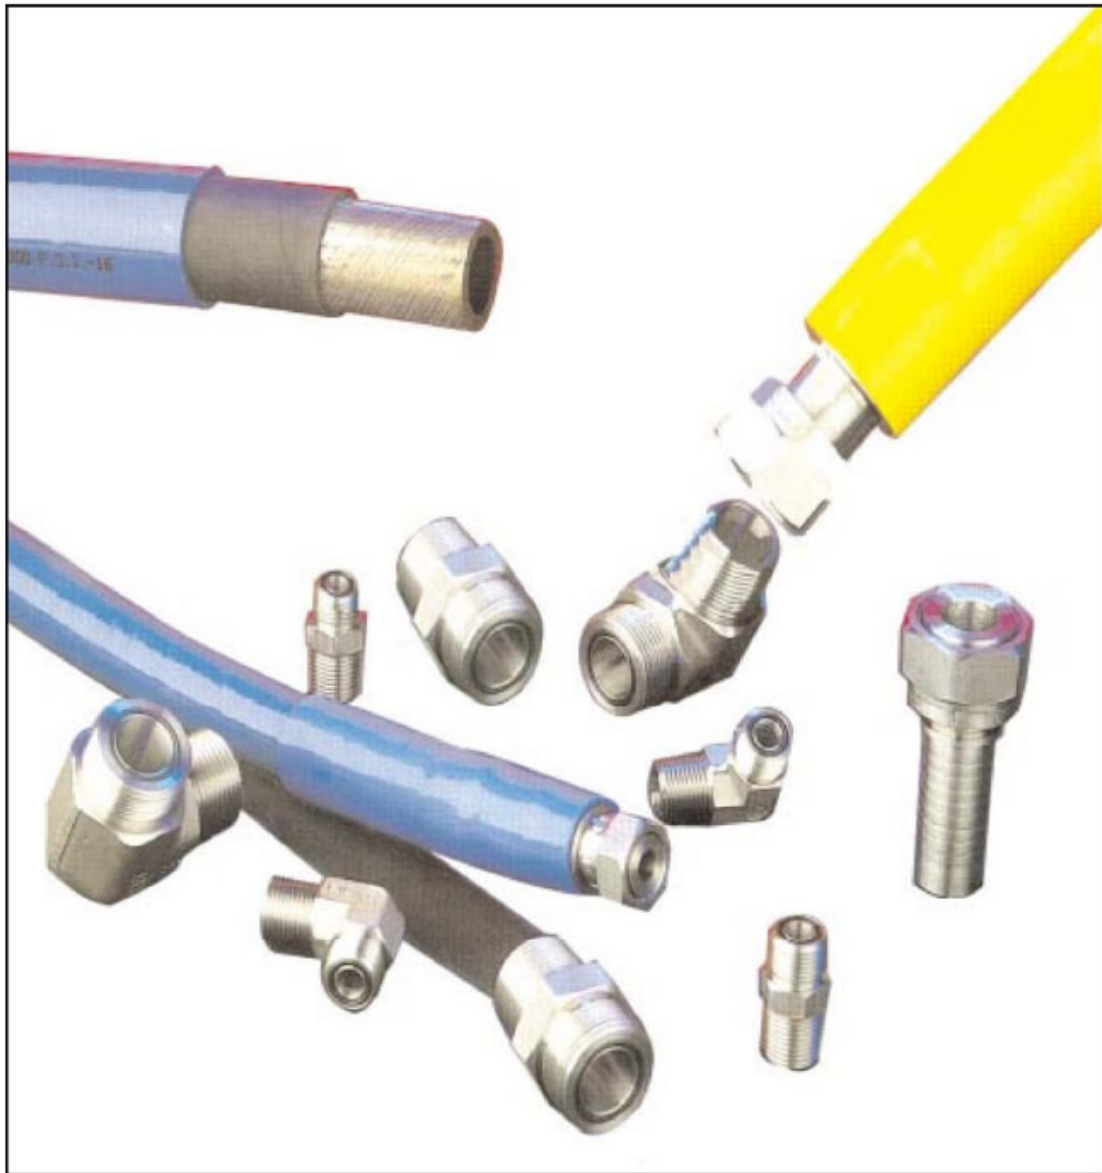

“A Hose Assembly Development for a Specific Application”

The hose and fitting that offers extended life, improved performance with total sealing capability.

Cover Colour Identification : Blue & Yellow
(Green available to special order)

Size				Working Pressure		Test Pressure		Bend Radius		Part Number
I.D.		O.D.								
Inch	mm	Inch	mm	PSI	BAR	PSI	BAR	Inch	mm	
1/4	6.3	*0.86	*21.8	7,000	480	10,500	724	5.9	150	7KBP-04-Y\B
1/2	12.7	*1.10	*28	6,000	414	9,000	620	9.0	230	5KBP-08-Y\B
**3/4	19	*1.40	*35.8	5,500	380	8,250	570	12.0	300	5KBP-12-Y\B
1	25	*1.70	*43	5,000	345	7,500	518	15.0	340	5KBP-16-Y\B
1 1/2	38	*2.40	*61.0	5,000	345	7,612	525	20.0	508	5KBP-24-Y\B

*Approximate outside diameter - extruded cover thickness - 1.6/2.0mm

** This size is made to special order due to market demand.

Colour Code: Part number suffixed with Y = Yellow.
Part number suffixed with B = Blue.

HOSE CONSTRUCTION

Tube Service compatible resistant synthetic tube.

Reinforcement Four high tensile steel spirals.

Cover Synthetic rubber cover.

Extra Extruded Cover Thermoplastic Polyurethane.

Elastomer Extrusion - which offers:-

- Excellent wear resistance.
- Total assembly encapsulation with the prevention of sea water ingress, particularly from external pressure in deep water operation.
- Corrosion elimination.
- Resistance against microbial attack.
- Withstands repeated flexing.
- Flame-proof - halogen free.